

The easy solution
for fixing tiles
and stones.

Presenting Weber tile and stone adhesives.

Tile | Stone fixing and Care solutions

we
care



Tile and Stone fixing solutions

Adhesive for ceramic tiles on wall & floor and low porosity tiles on the floor weberset classic

● Grey

weberset classic is a high polymer modified thinset tile and stone adhesive, specially formulated for fixing low porosity vitrified tiles on the floor in internal areas. The adhesive can also be used for fixing ceramic tile on wall and floor and suitable for the tile-on-tile application.

Features

• High Bond strength. Thixotropic formula - no sag, for the easy application on the wall. • Low VOC - For healthy living, self-curing properties which allow for no-hassle application with minimum labour. • No hacking of the substrate required to achieve the necessary bonding.

Recommended Substrates*

Cementitious screed, plaster, concrete masonry, blocks, and tile-on-tile application in internal areas.

Coverage**

For a 3 mm bed thickness the coverage will be 4-4.5 kg/sqmtr.

Pack Size: 20 kg & 40 kg



Adhesive for porous tiles weberset premier

● Grey

weberset premier is a polymer modified, thinset tile adhesive for ceramic tiles, in internal areas. It is suitable for both vertical and horizontal application, over the cementitious substrate.

Features

• Low VOC - for healthy living. • Excellent adhesion properties - No hacking of substrate required. • No sag formula: allows for hassle-free application on vertical walls. • Very low shrinkage prevents debonding and gives longer life to tiles.


Recommended Substrates*

Cementitious screed and plasters in internal areas.

Coverage**

For a 3 mm bed thickness the coverage will be 4-4.5 kg/sqmtr.

Pack Size: 20 kg & 40 kg

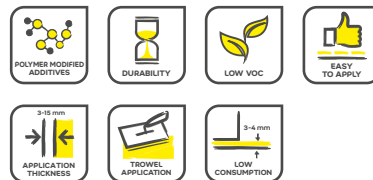

Adhesive For fixing low porosity vitrified tiles on wall & floor, and natural stones on the floor weberset nova

● Grey
● White

weberset nova is a high polymer modified thinset tile and stone adhesive, specially formulated for fixing low porosity vitrified tiles on wall and floor, and natural stones on the floor. The adhesive can be used for both internal and external as well as in dry and wet areas.

Features

• High Bond strength. • The free flowing product, makes it easier to mix and apply. • Easy to use. • Suitable for both internal and external application. • Can be used for new construction, as well as for renovation over existing floors/facades. • Thixotropic formula - no sag, for the easy application on the wall. • Low VOC - For a healthy living.

Recommended Substrates*

Cementitious screed, plaster, concrete masonry, blocks, RCC, self-leveling screeds, and tile-on-tile on tile and stone.

Coverage**

For a 3 mm bed thickness the coverage will be 4-5 kg/sqmtr.

Pack Size: 20 kg & 40 kg



Adhesive for window framing, tile cladding and natural stone flooring

weberset plus-white

● White

weberset plus-white is a polymer modified cementitious tile adhesive used for fixing vitrified tiles and natural stones on wall and floor, for both internal as well as external areas. It has been specially modified to give high bond with natural stone, even when used at high bed thickness, making it appropriate to be used on window sills/jams.

Features

- Easy to apply.
- High bonding strength.
- Can be used at higher bed thickness.
- Premixed material - Add only water.
- Slip-resistant for vertical application.
- Shrinkage cracks get minimized/eliminated due to its self-curing properties.

Recommended Substrates*


Cementitious screed, plaster, concrete masonry, blocks, and tile on for internal as well as external areas. Specially recommended to be used on window sills/jams.



Coverage**

For a 3 mm bed thickness the coverage will be 4-4.5 kg/sqmtr.

Pack Size: 20 kg

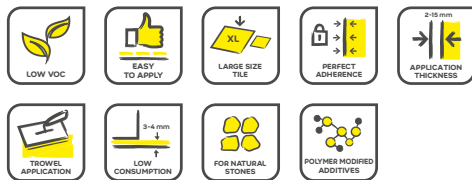

Adhesive for glass mosaics

weberset glass mosaic

● White

weberset glass mosaic is a flexible, cement based polymer modified tile adhesive with the finest particle size, specially designed for fixing glass mosaic for internal as well as external applications. It is also suitable for fixing all types of ceramic wall and floor tiles, mosaics, marble, terrazzo, natural stone, brick slips and glass blocks in dry or wet areas, including swimming pools.

Features

- Brightest white adhesive enhances the color of glass mosaic.
- It is water resistant, can be used to fix various types of tiles including glass mosaics in swimming pools & other wet areas.
- It can sustain heat ageing.
- It has no shrinkage and is particularly suited for situations where some movement, deflection or limited shrinkage is likely.
- Absorbs dynamic loads - suitable to use in swimming pools where the water pressure or load may vary.
- Quick setting times, which helps in faster construction.
- Can be used at depths up to 10 m underwater.

Recommended Substrates*


Especially recommended for glass mosaic and stones due to its white color, which adds color and aesthetic look. Recommended for application on cementitious substrates and self-levelling screeds, blocks and suitable under wet and dry conditions including swimming pools and fountains.

Coverage**

For a 2 mm bed thickness the coverage will be 2-2.5 kg/sqmtr.



Pack Size: 20 kg

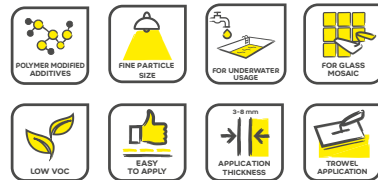

Adhesive for natural stones cladding

weberset firm

● Grey
● White

weberset firm is a highly polymer modified, high-performance thinset adhesive, for tiles, mosaics, and natural stones on a variety of surfaces. It can be used for both vertical and horizontal applications as well as in indoor and outdoor use.

Features

- Highly polymer modified adhesive which provides high structural adhesion, also allows users to use it on a variety of substrates for fixing a range of tiles and stones.
- Can be used for new construction as well as for renovation over existing floors/facades.
- No hacking of substrate required to achieve the necessary bonding.
- No sag formula: allows for hassle-free application on vertical walls, without any slippage.
- Water resistant, making it suitable for swimming pools, bathrooms, kitchen, saunas, and spa.
- Sustains heat ageing, making it ideal for high-temperature locations, for outdoor use and also for hot temperature applications, like Jacuzzi, sauna, etc.
- No shrinkage prevents debonding and gives longer life to tiles and stones.
- It absorbs a dynamic load.

Recommended Substrates*

Cementitious screed, plaster, concrete masonry, blocks, RCC, self-levelling screeds, cementitious waterproofing, gypsum plaster, and tile-on-tile on tile and stone.

Coverage**

For a 3 mm bed thickness the coverage will be 4-4.5 kg/sqmtr.

Pack Size: 20 kg



Adhesive for tiles & stones in vibration prone areas

weberset flex

● Grey
● White

weberset flex is a high polymer modified adhesive for fixing tiles and natural stones of large format both on the wall as well as on the floor, where nominal substrate movement is expected – recommended for external cladding due to high bond strength.

Features

- Excellent adhesion properties, no slip is observed on vertical applications.
- Shrinkage cracks get minimized/eliminated due to its self-curing properties.
- The larger quantity of the material can be mixed at a time due to its longer pot life.
- Suitable for heavy duty application with moderate structural movements.


Recommended Substrates*

Substrates subjected to moderate vibration, including cementitious screed, plaster, concrete masonry, blocks, RCC, self-levelling screeds, cementitious waterproofing, gypsum plaster, and tile-on-tile on tile and stone.

Coverage**

For a 3 mm bed thickness the coverage will be 4-5 kg/sqmtr.

Pack Size: 20 kg

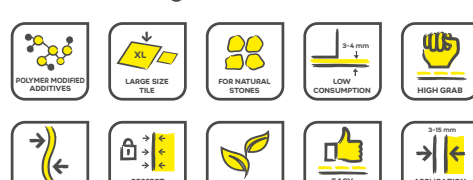

Adhesive for artificial stone cladding

weber set ultra

- White

weber set ultra is a two-component high performance modified adhesive used for fixing impregnated stone, and large format tiles and stones where nominal to moderate substrate movement is expected – recommended for both internal and external as well as wall and floor areas.

Features

- Especially suited for fixing impregnated stone and composite marble.
- Two component product.
- Highly flexible, to withstand medium substrate movement.
- Ultimate adhesion strength.
- Longer workability for easy and faster application.


Recommended Substrates*

Substrates subjected to moderate vibration, including cementitious screed, plaster, concrete masonry, blocks, RCC, self-leveling screeds, cementitious waterproofing, gypsum plaster, and tile-on-tile on tile and stone.

Coverage**

For a 3 mm bed thickness the coverage for Single spreading will be 4 - 4.5 kg/sqmtr.
Double spreading 6 kg/sqmtr.

Pack Size: 16 kg Component A + 5 Kg Component B

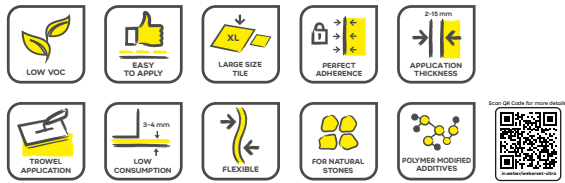

Adhesive for large format stone on drywall and plywood

weber fix drywall

weber fix drywall is a two-component high-performance tile and stone adhesive, used for almost all types of tiles and stones, over nearly all types of substrates including green & moisture sensitive marble and agglomerates. weber fix drywall is specially formulated, for fixing large format tiles and stones on drywall and plywood.

Features

- Moisture free system: Does not damage wooden substrates or tiles, and water sensitive stone.
- Very High Bond strength.
- Two Component adhesive: prevents wastage, as the only quantity which is required has to be mixed.
- Fast Setting.
- Can do cladding up to 50 ft. height, without any supporting bracket*.
- Under tile treatment of stone (to prevent discoloration) is not required.
- Can be used for fixing moisture sensitive stones, like green marble.
- Reaction bases system, and thus not harshly affected by temperature & humidity.
- Can be used on touch dry surface of the concrete. Do not need to wait for the substrate to get completely dry.

Recommended Substrates*

Especially designed for fixing large format tiles and stones on cementitious substrates, all types of drywall like plywood, gypsum boards, bison panel etc.

Coverage**

For every mm bed thickness the coverage will be 1.62 kg/sqmtr.

Pack Size: 20 kg (Component A: 15 kg Bucket Component B: 5 kg Bucket)
5 kg (Component A: 3.75 kg & Component B: 1.25 kg inside bucket)



Adhesive for tile and stone on metal and glass surface

weber epoxy adhesive

weber epoxy adhesive is a three-component, heavy duty, chemical resistant adhesive for fixing tile and stone of small and big format on wall and floor. It provides excellent, highly durable bond strength for fixing tile and stone on various surfaces. Can be used for both dry and wet as well as external and internal applications.

Features

- Excellent adhesion properties - tile and stone can be fixed on the surface like metal sheet, aluminum panels, glass, plywood, and gypsum board.
- Highly durable and impact resistance.
- Can be used in chemical prone areas.
- Can be used at a higher height level without mechanical fixing.
- Can be used for fixing tile and stone on the ceiling and elevated structures.

Recommended Substrates*

On metal, MS sheets, aluminum panel, RCC, self-levelling screed, acrylic sheet, metal ACP sheets, fiber-cement, gypsum board and plywood.

Coverage**

For 3 mm bed thickness the coverage will be 5-6 kg/sqmtr.

Pack Size:

6 kg weber bond poxy (resin-hardener kit)
18 kg weber bond poxyfill (epoxy adhesive filler)



Application tools

weber notched trowel

Product description

6mm x 6mm weber notched trowel suitable for 3mm bed thickness.

Features

- Special high wear resistance.
- Ergonomic handle for ease of use.
- Perfect flatness of the plate.
- Improves adherence of the mortar on to work surface.

weber tile spacer

Product description

Spacers for obtaining a perfect finish in any tile and stone installation work.

Features

- For perfect spaces in between tiles.
- Quality base material, without impurities or imperfections.
- Suitable for all types of tiles and stones.
- Available in 2, 3, 4, 5 and 10 mm thickness.

Tile and Stone Care

Under-tile impregnator for stones prone to discoloration webersys stoneprotect

webersys stoneprotect is a penetrating sealer that protects the interior of extra porous stones such as fine-grained granites, marble, limestone, slate, and sandstone. It can also provide repellency for concrete and grouts. This below surface sealer is recommended for sealing stones for both interior and exterior.

Features

- Water-based formula eliminates any chances of fire.
- Ready to use product.
- Simple to apply and user-friendly.
- Helps adhesion and prevents penetration of fluids and dirt.
- Safe on food handling surface.

Technical Parameter

Specific gravity : 1.02+/-0.01
pH Value : 7-9
Colour : Milky white
Viscosity : B4 cup 12-16 sec

Consumption

12-20 sqmtr/L for double coat. Consumption may vary depending on surface conditions and porosity material.

Pack Size: 20 L Drum & 1 L Bottle



Solvent based impregnating sealer for tiles and stones webersys stoneseal

webersys stoneseal is a solvent based sealer designed for the protection of natural and synthetic stone. The unique formulation gives an excellent water repellent as well as oleophobic, i.e. oil repellent properties. It exhibits high resistance to oil and water stain on the surface treated with weber stoneseal. The treated pores of the surface form an invisible barrier allowing the vapor diffusion due to penetrating effect. It sets to form hard-wearing film while maintaining the natural color of stone and tile.

Features

- Solvent-based system Used for even low porous stone and marble.
- Easy to apply using brush, sponge or cloth.
- Can be applied for both external and internal application.
- Highly durable and economical.
- Ready to use no dilution required at the site.
- Superior coverage.
- Seal and protect against the stain of eatables.

Technical Parameters

Appearance : Light Yellowish
Density at 25°C : 0.86 +/- 0.02 g/cc

Consumption

3sqmtr – 30 sqmtr/L (consumption may vary depending on the porosity level of the surface.)

Pack Size: 20 L Drum & 1 L Bottle



Water based impregnating sealer for tiles and stones webersys aquaseal

webersys aquaseal is a water-based sealer designed for the protection of natural and synthetic stone. The unique formulation gives an excellent water repellent as well as oleophobic, i.e. oil repellent properties. It exhibits high resistance to oil and water stain on the surface treated with weber stoneseal. The treated pores of the surface form an invisible barrier allowing the vapour diffusion due to penetrating effect. It sets to form hard-wearing film while maintaining the natural color of tile and stone.

Features

- Water-based system Used for even low porous stone and marble.
- Easy to apply using brush, sponge or cloth.
- Can be applied for both external and internal application.
- Highly durable and economical.
- Ready to use no dilution required at the site.
- Superior coverage.
- Seal and protect against the stain of eatables.


Technical Parameters

Appearance : Clear liquid
Density : 1.02 + 0.02 g/cc
pH value : 7 - 9

Consumption

3sqmtr – 35 sqmtr/L, (consumption may vary depending on the porosity level of the surface.)

Pack Size: 20 L Drum, 5 L & 1 L Bottle



Heavy duty tile cleaner for tough stains

**weberklin
ceraplus**

weberklin ceraplus is a specially formulated ceramic surface cleaner and tough cement stain remover. Can be used on all types of ceramic material and can also remove salt buildups due to stagnant water/continuous exposure to water with ease.

Features

- Easily removes even tough cement stains.
- No etching of ceramic products.
- Does not affect the glaze of tiles.
- Economical in use.
- Removes all residual substances, like soap, scum deposit, mineral and salt deposits easily.
- When used before grouting tile joints, provides contamination free grout, with longer life and better color performance.

Technical Information

Colour : Blue
Specific Gravity : 1.05 @ 27°C
Soaking time : 3-5 min

Pack Size: 1 L Bottle




TILE & STONE FIXING



in.weber/complete-tile-and-stone-fixing-solution

Scan QR code for complete tile and stone fixing solutions

TILE & STONE CARE



in.weber/complete-tile-and-stone-care-solution

Scan QR code for complete tile and stone care solutions

Scan QR Code for Weber App



<https://goo.gl/d39avs>

Scan QR code to download android app for product information and technical data for our complete product range, directly from your smartphone.




* For more details, refer technical data sheet, or consult Weber technical services

** Note: The coverage will vary depending on surface undulations


Tile adhesive - Directions for use




Clean the substrate of oil stains and bond inhibiting compounds. Also, remove any loose particles dirt, dust, and laitance.




Ensure that the surface is flat (hard and rigid) for the given application.



Ensure that the surface is well saturated before application in the case of cementitious substrates.



Mix as per mixing ratio defined in the datasheet.



For cementitious adhesive always add the powder to water.




After mixing allow the paste to stand for 2 min for it to mature.



Do not attempt to extend the pot life by adding more water to the mix.



Apply adhesive over the surface using the straight edge of the notched trowel. If the adhesive is buttered to the tile, then ensure proper coverage of tile surface to avoid voids.



Use Weber tile spacer for recommended spacing between the tiles.



After 24 hours, grouting can be done on tiles and stones.

Saint-Gobain India Pvt. Ltd. – Weber business,

Corporate Office: 5th level, Leela Business Park, Andheri-Kurla Road, Andheri East, Mumbai – 400059 India. Email: weber-india@saint-gobain.com

weber
Connect

18004252778

www.in.weber

/SaintGobainWeberIndia

/SGWeberIndia

/SaintGobainWeberIndia

/SaintGobainWeberIndia

/company/saint-gobain-weber-india

SAINT-GOBAIN